

Artikel Nr.: 348103

Deckenaufbauleuchte, Sculptoris 45, Signalweiß RAL 9003, 220-240V AC/50-60Hz, Warmweiß

Technische Daten

Charakteristik

Material	Aluminium / Kunststoff
Farbe	Signalweiß RAL 9003
Optik	matt/ milchig
im Lieferumfang	5x Schrauben mit Dübel



Elektrische Daten

Leistung	27,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	inkl. LED-Netzgerät
Ansteuerung	Phasenanschnitt oder Phasenabschnitt
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I


Lichttechnische Eigenschaften

Leuchtmittel	Lichtquelle fest
Lichtfarbe	Warmweiß
Farbtemperatur	3000 K
Lichtstrom	1700 lm
Abstrahlwinkel	150°
LED Typ	SMD
LED Anzahl	168
Strahlungsverteilung	582 nm




Artikel Nr.: 348103

Deckenaufbauleuchte, Sculptoris 45, Signalweiß RAL 9003, 220-240V AC/50-60Hz, Warmweiß



Lichtrichtung

Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	

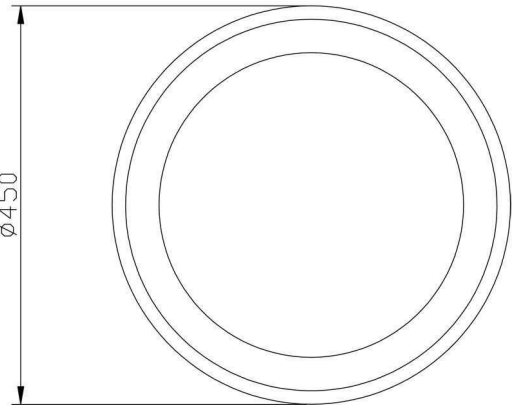

Abmessungen und Gewicht

Länge (mm)	0,00
Breite (mm)	0,00
Höhe (mm)	130,00
Durchmesser (mm)	450,00
Deckenabhängung (mm)	0,00
Gewicht	1630 g

Sockelmaß

Länge (mm)	0,00
Breite (mm)	0,00
Höhe (mm)	22,00
Durchmesser (mm)	395,00

Artikel Nr.: 348103

Deckenaufbauleuchte, Sculptoris 45, Signalweiß RAL 9003, 220-240V AC/50-60Hz, Warmweiß

Grenzwerte

Betriebstemperatur	-10°C - +45°C
Lagertemperatur	-10°C - +45°C
IP - Schutzart	IP20

Allgemeine Eigenschaften

Umwelteigenschaften

Energieeffizienzklasse	E
Energieverbrauch	27 kWh/1000h

Lebensdauer

Lebensdauer	20000 h
Lichtstrom Ende Lebensdauer	0,70
Schaltzyklen	15000

EEI	Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E
IP20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.

Article no.: 348103

Surface mounted ceiling lamp, Sculptoris 45, Signal white RAL 9003, 220-240V AC/50-60Hz, warmwhite

**Technical Data****General Characteristics**

Material	aluminum / plastic
Colour	Signal white RAL 9003
Optics	/ milky
included in delivery	5x screws with dowels

Electrical Characteristics

Power	27,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	leading edge or trailing edge
Connection possibility	clamp
Protection class I, II, III	I


Light Technical Data

Bulb	Lichtquelle fest
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	1700 lm
Beam angle	150°
LED type	SMD
LED quantity	168
Spectral power distribution	582 nm




Article no.: 348103

Surface mounted ceiling lamp, Sculptoris 45, Signal white RAL 9003, 220-240V AC/50-60Hz, warmwhite

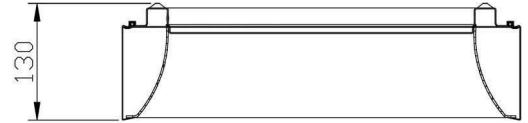**Light Direction**

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

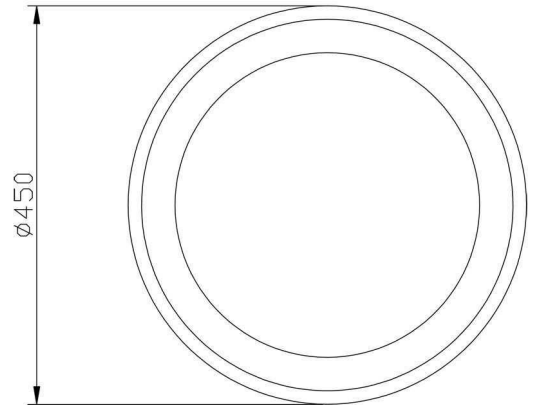**Dimensions & Weight**

Length (mm)	0,00
Width (mm)	0,00
Height (mm)	130,00
Diameter (mm)	450,00
Suspensions from ceiling (mm)	0,00
Product Weight	1630 g

Base dimensions

Length (mm)	0,00
Width (mm)	0,00
Height (mm)	22,00
Diameter (mm)	395,00

Article no.: 348103

Surface mounted ceiling lamp, Sculptoris 45, Signal white RAL 9003, 220-240V AC/50-60Hz, warmwhite

Absolute maximum ratings

Working temperature	-10°C - +45°C
Storage temperature	-10°C - +45°C
IP - Code	IP20

General product data**Environmental Characteristics**

Energy label	E
Energy consumption	27 kWh/1000h

Lifespan

Lamp life time	20000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

EEI	This product contains a light source of energy efficiency class E
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.