

Artikel Nr.: 348121

Deckenaufbauleuchte, Aurigae, weiß, 220-240V AC/50-60Hz, Warmweiß

Technische Daten

Charakteristik

Material	Aluminium Druckguss / Keramik
Farbe	weiß
Optik	/ milchig
im Lieferumfang	3x Schrauben mit Dübel und Dichtung



Elektrische Daten

Leistung	22,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	inkl. LED-Netzgerät
Ansteuerung	nicht dimmbar
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I

Lichttechnische Eigenschaften

Leuchtmittel	Lichtquelle fest
Lichtfarbe	Warmweiß
Farbtemperatur	3000 K
Lichtstrom	1550 lm
Abstrahlwinkel	110°
LED Typ	SMD
LED Anzahl	172
Strahlungsverteilung	583 nm



Artikel Nr.: 348121

Deckenaufbauleuchte, Aurigae, weiß, 220-240V AC/50-60Hz, Warmweiß

Lichtrichtung


Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

Abmessungen und Gewicht

Länge (mm)	250,00
Breite (mm)	250,00
Höhe (mm)	60,00
Durchmesser (mm)	0,00
Deckenabhängung (mm)	0,00
Gewicht	1460 g

Sockelmaß

Länge (mm)	190,00
Breite (mm)	190,00
Höhe (mm)	20,00
Durchmesser (mm)	0,00

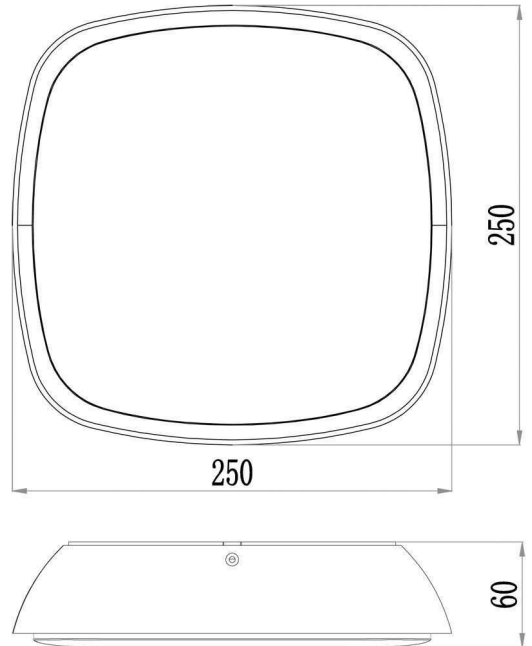

Artikel Nr.: 348121

Deckenaufbauleuchte, Aurigae, weiß, 220-240V AC/50-60Hz, Warmweiß

Grenzwerte

Betriebstemperatur	-20°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP65

Allgemeine Eigenschaften

Umwelteigenschaften

Energieeffizienzklasse	G
Energieverbrauch	20 kWh/1000h

Lebensdauer

Lebensdauer	20000 h
Lichtstrom Ende Lebensdauer	0,70
Schaltzyklen	15000

EEI	Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G
IP65	Schutz gegen das Eindringen von Staub. (Staubdicht) Geschützt gegen Strahlwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.

Article no.: 348121

Surface mounted ceiling lamp, Aurigae, white, 220-240V AC/50-60Hz, warmwhite

Technical Data**General Characteristics**

Material	aluminum die casting / plastic
Colour	white
Optics	/ milky
included in delivery	3x screws with dowels and sealings

**Electrical Characteristics**

Power	22,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	clamp
Protection class I, II, III	I

Light Technical Data

Bulb	Lichtquelle fest
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	1550 lm
Beam angle	110°
LED type	SMD
LED quantity	172
Spectral power distribution	583 nm



Article no.: 348121

Surface mounted ceiling lamp, Aurigae, white, 220-240V AC/50-60Hz, warmwhite

Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length (mm)	250,00
Width (mm)	250,00
Height (mm)	60,00
Diameter (mm)	0,00
Suspensions from ceiling (mm)	0,00
Product Weight	1460 g

Base dimensions

Length (mm)	190,00
Width (mm)	190,00
Height (mm)	20,00
Diameter (mm)	0,00

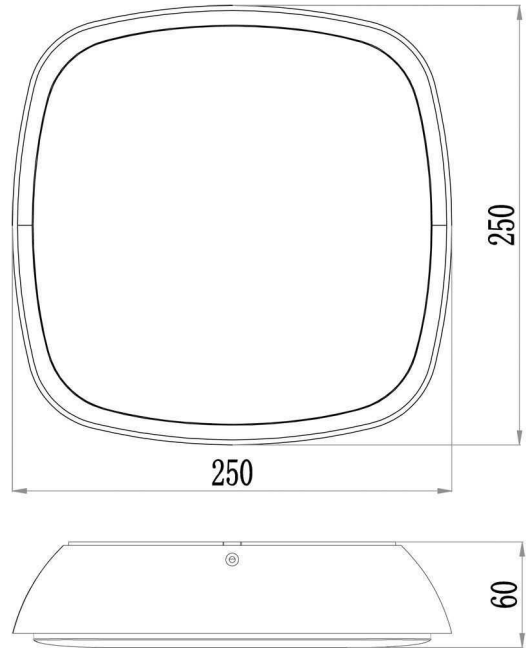

Article no.: 348121

Surface mounted ceiling lamp, Aurigae, white, 220-240V AC/50-60Hz, warmwhite

Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65

General product data**Environmental Characteristics**

Energy label	G
Energy consumption	20 kWh/1000h

Lifespan

Lamp life time	20000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

EEI	This product contains a light source of energy efficiency class G
IP65	Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.