

Artikel Nr.: 565103

Deckeneinbauleuchte, LED Panel 16, Signalweiß RAL 9003, 24V DC, Warmweiß + Kaltweiß

Technische Daten

Charakteristik

Material	Aluminium Druckguss
Farbe	Signalweiß RAL 9003
Optik	
im Lieferumfang	



Elektrische Daten

Leistung	15,00 W
Eingangsspannung	24V DC
Eingangsstrom	
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	
Ansteuerung	dimmbar über optionalen Controller
Anschlussmöglichkeit	offene Kabel
Schutzklasse I, II, III	III

Artikel Nr.: 565103

Deckeneinbauleuchte, LED Panel 16, Signalweiß RAL 9003, 24V DC, Warmweiß + Kaltweiß

Lichtrichtung


Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

Abmessungen und Gewicht

Länge	0,00
Breite	0,00
Höhe	20,00
Durchmesser	236,00
Einbautiefe	20,00
Gewicht	538 g

Ausschnittsmaß

Länge	0,00
Breite	0,00
Durchmesser	222,00

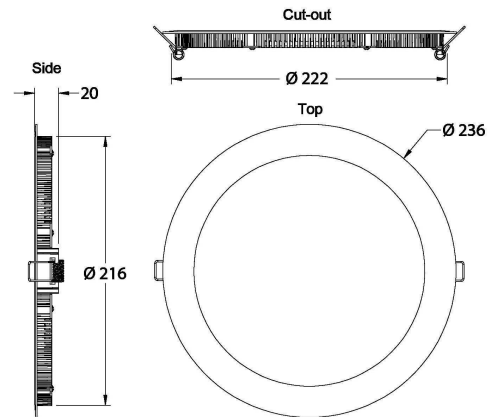

Artikel Nr.: 565103

Deckeneinbauleuchte, LED Panel 16, Signalweiß RAL 9003, 24V DC, Warmweiß + Kaltweiß

Grenzwerte

Betriebstemperatur	-5°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP20

EEI	Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G
IP20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
	Leuchte der Schutzklasse III Leuchte, bei der der Schutz gegen elektrischen Schlag auf der Anwendung der Schutzkleinspannung (SELV) beruht und in der Spannungen höher als SELV nicht erzeugt werden.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.

Article no.: 565103

Built in ceiling lamp, LED Panel 16, Signal white RAL 9003, 24V DC, warmwhite + coldwhite

Technical Data

General Characteristics

Material	aluminum die casting
Colour	Signal white RAL 9003
Optics	
included in delivery	



Electrical Characteristics

Power	15,00 W
input voltage	24V DC
input current	
Base (standard designation)	
Number of bases	
Power supply unit	excl. LED-power supply unit
Electronically reversible	dimnable via optional controller
Connection possibility	wire with open ends
Protection class I, II, III	III



Article no.: 565103

Built in ceiling lamp, LED Panel 16, Signal white RAL 9003, 24V DC, warmwhite + coldwhite

Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	0,00
Width	0,00
Height	20,00
Diameter	236,00
Mounting Depth	20,00
Product Weight	538 g

Cut-out dimensions

Length	0,00
Width	0,00
Diameter	222,00

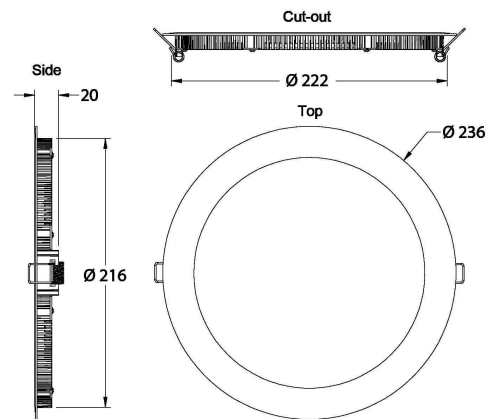

Article no.: 565103

Built in ceiling lamp, LED Panel 16, Signal white RAL 9003, 24V DC, warmwhite + coldwhite

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP20

EEI	This product contains a light source of energy efficiency class G
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class III Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.