

Artikel Nr.: 731059

Wandaufbauleuchte, Facado A, Dunkelgrau, 220-240V AC/50-60Hz, 1x max. 20,00 W

Technische Daten

Charakteristik

Material	Aluminium Druckguss / Kunststoff
Farbe	Dunkelgrau
Optik	/ satiniert
im Lieferumfang	4 x schrauben mit dübel

Elektrische Daten

Leistung	1x max. 20,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	E27
Anzahl Sockel	1
Netzgerät	exkl. LED-Netzgerät
Ansteuerung	dimmbar über optionales Leuchtmittel
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I



Artikel Nr.: 731059

Wandaufbauleuchte, Facado A, Dunkelgrau, 220-240V AC/50-60Hz, 1x max. 20,00 W

Lichtrichtung


Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	

Abmessungen und Gewicht

Länge (mm)	243,00
Breite (mm)	110,00
Höhe (mm)	150,00
Durchmesser (mm)	0,00
Deckenabhängung (mm)	0,00
Gewicht	1467 g

Sockelmaß

Länge (mm)	120,00
Breite (mm)	90,00
Höhe (mm)	35,00
Durchmesser (mm)	0,00

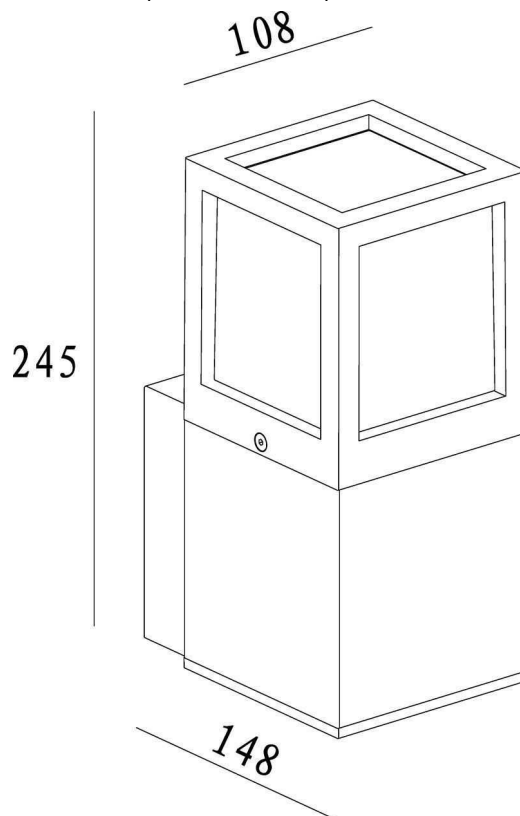

Artikel Nr.: 731059

Wandaufbauleuchte, Facado A, Dunkelgrau, 220-240V AC/50-60Hz, 1x max. 20,00 W

Grenzwerte

Betriebstemperatur	-20°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP54

IP54	Schutz gegen das Eindringen von Staub. (Staubschutz) Geschützt gegen Spritzwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.

Article no.: 731059

Surface mounted wall lamp, Facado A, dark gray, 220-240V AC/50-60Hz, 1x max. 20,00 W

Technical Data

General Characteristics

Material	aluminum die casting / plastic
Colour	dark gray
Optics	/ satin
included in delivery	4 x screws with dowels

Electrical Characteristics

Power	1x max. 20,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	E27
Number of bases	1
Power supply unit	excl. LED-power supply unit
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I



Article no.: 731059

Surface mounted wall lamp, Facado A, dark gray, 220-240V AC/50-60Hz, 1x max. 20,00 W

Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

Dimensions & Weight

Length (mm)	243,00
Width (mm)	110,00
Height (mm)	150,00
Diameter (mm)	0,00
Suspensions from ceiling (mm)	0,00
Product Weight	1467 g

Base dimensions

Length (mm)	120,00
Width (mm)	90,00
Height (mm)	35,00
Diameter (mm)	0,00

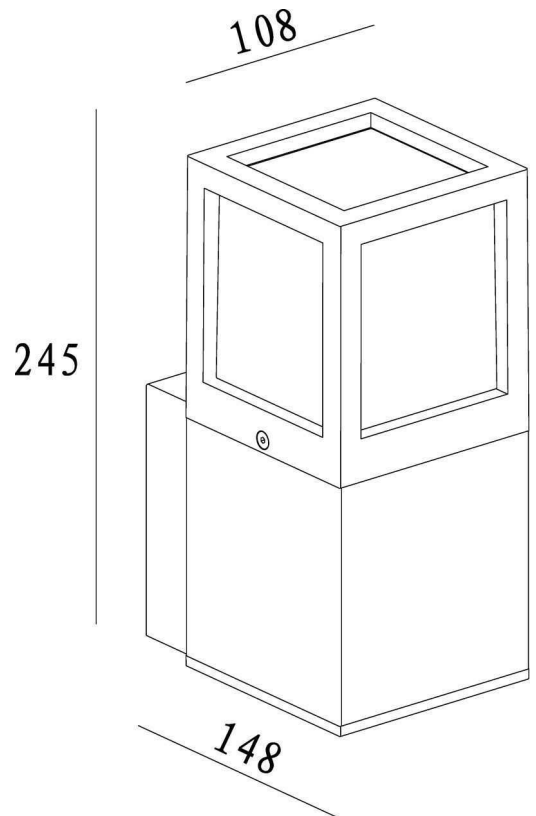

Article no.: 731059

Surface mounted wall lamp, Facado A, dark gray, 220-240V AC/50-60Hz, 1x max. 20,00 W

Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP54

IP54	Protection against penetration of dust. (dust protected) Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.